



FELCO 22 - Green

Two-hand pruning shear - Lopper - Length 84 cm (33.1 in.)

Made in Switzerland by FELCO

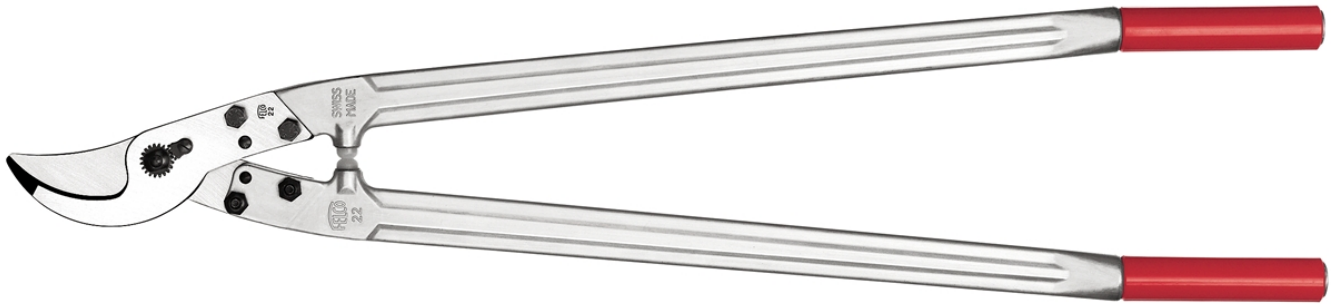

45mm/1.8in. 840mm/33.1in. 1980g/69.8oz.



- > **Reliable:** sturdy handles made of forged aluminium with a lifetime guarantee* / blade and screw-mounted anvil blade made of high-quality hardened steel / clean, precise cut / all parts can be replaced
- > **Efficient:** easy, durable cutting adjustment / wide blade opening
- > **Ergonomic:** shock absorbers protect wrists and arms / handles with non-slip plastic coating

RECOMMENDED FOR

Our recommendation (★ = Recommended, ★★ = Strongly recommended, ★★★ = Best fit)

Viticulture	★★★
Arboriculture	★★★
Parks and Gardens	★★★
Small hand	★★★
Average-sized hand	★★★
Large hand	★★★
Right-handed	★★★
Left-handed	★★★

THE POINTS OF EXCELLENCE



Straight cutting head

Ultra-precise cutting heads for the most demanding work.



Micrometric adjustment

FELCO's micrometric adjustment system guarantees an optimal adjustment of the cutting head throughout the life of the tool. It ensures a clean and precise cut.



Shock absorption system

The shock absorbers soften the impact upon finishing cutting as well as protecting the hand and wrist.

ACCESSORIES



FELCO 902
Sharpening tool
Sharpening stone



FELCO 903
Sharpening tool
Sharpener












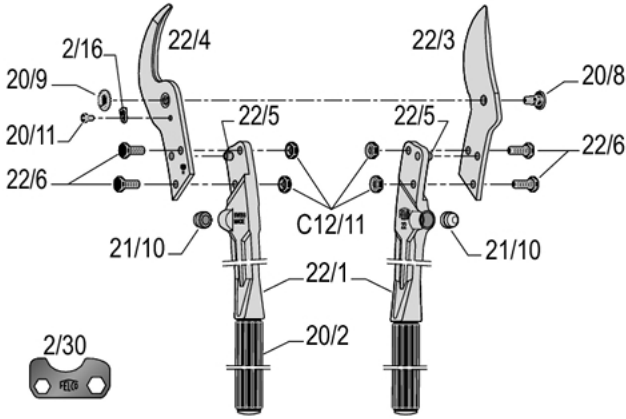









FELCO 980
Maintenance product
Spray














FELCO 990
Maintenance product
Grease

SPARE PARTS



FELCO	REF.	Designation	Composition	UCC Barcode
	2/30	Adjustment key	1x 2/30	
	22/3	Blade	1x 22/3	
	22/4	Anvil-blade	1x 22/4	
	21/93	Kit	2x 21/10	
	20/94	Kit	1x 20/9 + 1x20/8	
	22/1	Handle with coating, pin and shock absorber	1x 22/1 + 1x 20/2 + 1x 21/10 + 1x 22/5	
	20/2	Coating	1x 20/2	
	22/5	Pin	1x 22/5	
	22/6	Hexagon screw	1x 22/6	

	20/8	Bolt	1x 20/8	 7 83929 40177 5
	20/9	Nut	1x 20/9	 7 83929 40178 2
	C12/11	Counter nut	1x C12/11	 7 83929 40317 5
	2/16	Locking segment	1x 2/16	 7 83929 40157 7
	20/11	Screw for locking segment	1x 20/11	 7 83929 40172 0
	21/10	Shock absorber	1x 21/10	 7 83929 40183 6

MAINTENANCE



Cleaning

It is advisable to clean your tool after each use.

If your tool is particularly dirty or subject to rusting after exposure to moisture, do not delay cleaning.



Oiling

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.



Sharpening

It is advisable to sharpen your tool at least once a day, but if you feel that your tool is not cutting as well as usual, sharpen it right away!



Dismantling

It is advisable to dismantle your tool on a regular basis, but at the very latest when it appears to be jammed.

PARTS REPLACEMENT



Changing the blade

When the blade and the anvil-blade no longer cross, or when the blade is badly damaged, it is advisable to change it.

Regulate the working of the blade and anvil-blade by adjusting the tightening of the nut. The blade should rub against the anvil-blade over 2/3 of its length.



Changing the anvil-blade

When the blade and anvil-blade no longer cross and the anvil-blade is badly damaged, it is advisable to change it.



Changing the shock absorbers

When the tool closes too abruptly during pruning the shock absorbers should be changed.