




## FELCO C7 - Industrial

Cable cutter - Cable cutter

Made in Switzerland by FELCO

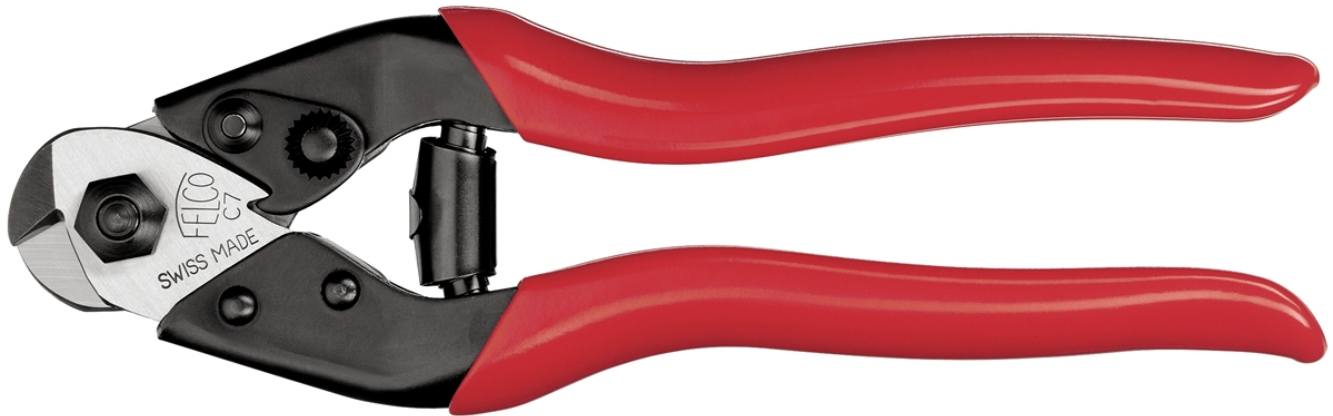

7mm/0.28in. 190mm/7.5in. 270g/9.5oz.





Gives a clean cut without squashing thanks to the triangular cutting system / blades and centre bolt in high-quality hardened steel for exceptional performance / thumb catch designed for one-handed operation / pressed steel handles with non-slip grips

## RECOMMENDED FOR

Our recommendation (★ = Recommended, ★★ = Strongly recommended, ★★★ = Best fit)

Cables, wire-drawing mills	★★★
Springs industry	★★★
Electricity, telecommunications	★★★
Oil industry	★★★
Automotive, pneumatics industry	★★★
Gondola lifts, cable cars, ski-lifts, life-lines	★★★
Aeronautics	★★★
Watersports	★★★
Harbour activities	★★★
Forestry Industry	★★★
Agriculture, viticulture	★★★
Packaging, unpacking, strips	★★★
DIY, leisure, floral arrangements	★★★
Cinema, theatre, events	★★★
Administration, police, customs	★★★
Civil engineering, buildings	★★★
Repair and manufacturing workshops	★★★
Small hand	★★★
Average-sized hand	★★★
Large hand	★★★
Right-handed	★★★
Left-handed	★★★

## CUTTING CAPACITIES

Material	Maximum cutting diameter
Galvanized steel cables, textile core	7mm (0.28in)
Galvanized steel cables, steel core	6mm (0.24in)
Hard steel cables, resistance 160 kg/mm <sup>2</sup>	5mm (0.2in)
Non-oxidable steel cables, resistance 190 kg/mm <sup>2</sup>	4mm (0.16in)
Extra tough cables and strands, resistance 210 kg/mm <sup>2</sup>	3mm (0.12in)
Electric cables (copper or aluminium) with steel core)	7mm (0.28in)
Aluminum- or copper rods	5mm (0.2in)
Iron rods, resistance 60 kg/mm <sup>2</sup>	4mm (0.16in)
Tempered spring wire	2.5mm (0.1in)
Welded wire mesh	
Rubber conveyor belt	

## THE POINTS OF EXCELLENCE



### High-strength blades

Hardened and tempered blades for cutting the strongest of cables.



### Triangular cutting action

FELCO's innovative triangular cut allows you to progressively cut cable wires and at the same time avoid squashing of strands. Thanks to this feature, it is generally not necessary to tie the cable before the cut.

**ACCESSORIES**



FELCO 902  
Sharpening tool  
Sharpening stone



FELCO 903  
Sharpening tool  
Sharpener



FELCO 910  
Holster  
Leather - With belt loop and clip



FELCO 912  
Holster  
Leather - With belt clip



FELCO 913  
Holster  
In mock leather - With belt loop










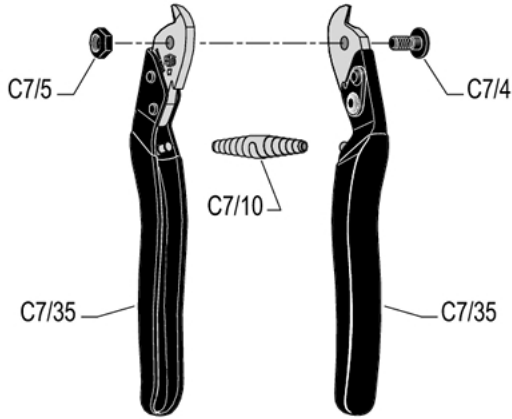

FELCO 980  
Maintenance product  
Spray



FELCO 990  
Maintenance product  
Grease

**SPARE PARTS**



FELCO	REF.	Designation	Composition	UCC Barcode
	C7/35	Coating	1x C7/35	 7 83929 40339 7
	C7/4	Bolt	1x C7/4	 7 83929 40340 3
	C7/5	Counter nut	1x C7/5	 7 83929 40341 0
	C7/10	Spring	1x C7/10	 7 83929 40338 0

**MAINTENANCE**



**Oiling**

After cleaning, it is advisable to oil the tool so as to protect it from corrosion. The oil will also unjam the tool.